

# T3PS3000 Data Sheet

## Programmable DC Power Supply

### Power with Confidence

**32 Volts –  
3.2 Amps –  
220 Watts**



T3PS3000 Rear View

### Tools for Improved Debugging

- **3 Independent isolated outputs** – 32 V/3.2 Ax2, 2.5 V/3.3 V/5 V 3.2 Ax1, total 220 W.
  - ✓ More application coverage from a single power supply.
- **High Resolution, High Precision Output** – 5 digits Voltage, 4 digits Current Display, Minimum Resolution: 1 mV/1 mA.
  - ✓ Excellent setting and read back accuracy.
- **3 output modes:** Series, Parallel and Independent.
  - ✓ Combine two channels into one for greater power output flexibility.
- **4.3 inch (10.92 cm) color TFT-LCD 480 x 272 display.**
  - ✓ Clear and flexible display aids ease of use.
- **Graphical display interface with waveform display function.**
  - ✓ View waveform shape and timing settings.
- **Intelligent temperature controlled cooling fan.**
  - ✓ Quieter operation by reducing fan speed during low load usage.

### Key Specifications

|                              |   |
|------------------------------|---|
| Independent Output Operation | 0 V – 32 V, 3.2 A x 2, 2.5V/3.3 V/5 V x 1, 3.2 A  |
| Parallel Output Operation    | 0 V – 32 V, 6.4 A x 1, 2.5 V/3.3 V/5 V x 1, 3.2 A |
| Series Output Operation      | 0 V – 64 V, 3.2 A x 1, 2.5 V/3.3 V/5 V x 1, 3.2 A |
| Maximum Power                | 220 Watts   |
| Connectivity                 | USB Device, LAN                                   |
| Remote Control               | SCPI, LabView Driver                              |


# PRODUCT OVERVIEW

Teledyne Test Tools new T3PS3000 is a Linear Programmable DC Power Supply with a 4.3 inch TFT LCD display. It has three isolated outputs: two adjustable channels and one selectable channel from 2.5 V, 3.3 V, and 5 V with output short and overload protection for each channel. Support for series and parallel operation of the two main channels extends its flexibility beyond the standard specification. The T3PS3000 features include programmability via USB or LAN, a graphical display of power waveforms, and the high resolution numeric display of voltage and current. Typical users are Education, Production, and Design and Development.

## FUNCTIONS AND CHARACTERISTICS

### High Resolution and High Precision Output

The highest resolution of 1 mV / 1 mA provides excellent setting and read back accuracy. This ensures accurate output even with very small changes in voltage or current.

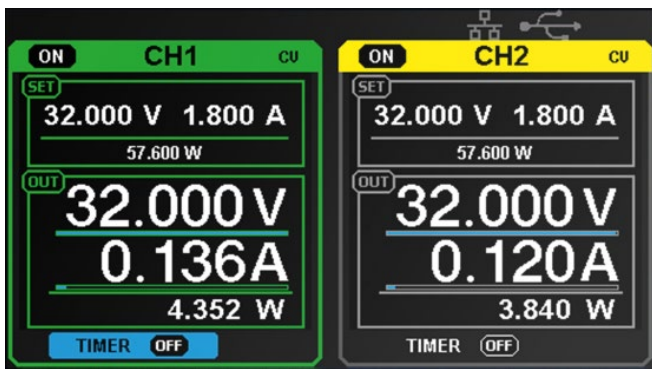


### T3PS3000 displays output waveforms and data tables

Through front panel operation, 5 groups of timing settings and output control settings can be displayed on the built in color TFT LCD display, which provides users a simple power programming function and visual indication of output waveform shape. Further control is available via USB or LAN connection to a PC, providing a full range of communication and control capability.



### Series / parallel / independent output configurations

Teledyne Test Tools T3PS3000 supports series and parallel output configurations allowing the two main channels to be combined into one output with more power output capability, extending the application range. Alternatively each output can be used independently giving the T3PS3000 maximum configuration flexibility and the widest range of application support.

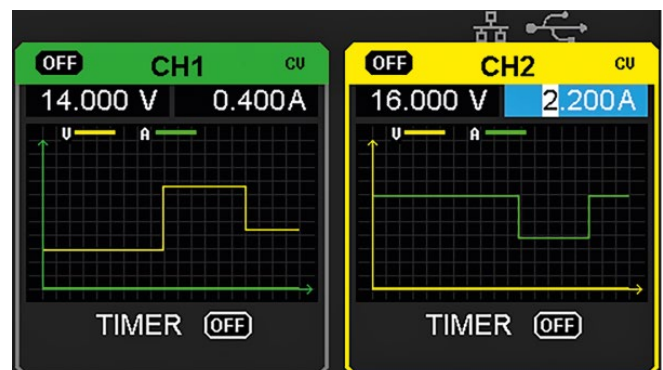

# SPECIFICATIONS

## T3PSU3000

|                                  |  |
|----------------------------------|--|
| Channel                          | CH1 output voltage: 0 ~ 32 V, output current: 0 ~ 3.2 A<br>CH2 output voltage: 0 ~ 32 V, output current: 0 ~ 3.2 A<br>CH3 output voltage: 2.5 / 3.3 / 5.0 V, output current: 3.2 A |
| Display                          | 4.3 inch color TFT-LCD<br>5 digits voltage 4 digits current  |
| Resolution                       | 1 mV / 1 mA  |
| Program Accuracy                 | Voltage $\pm$ (0.03 % of reading + 10 mV)<br>Current $\pm$ (0.3 % of reading + 10 mA)  |
| Readback Accuracy                | Voltage $\pm$ (0.03 % of reading + 10 mV)<br>Current $\pm$ (0.3 % of reading + 10 mA)  |
| Constant Voltage Mode            | Line Regulation $\leq$ 0.01 % + 3 mV   |
|                                  | Load Regulation $\leq$ 0.01 % + 3 mV   |
|                                  | Ripple & Noise $\leq$ 1 mVrms (5 Hz ~ 1 MHz)   |
|                                  | Recovery Time $<$ 50 $\mu$ s (50 % load change, minimum load 0.5 A)  |
| Constant Current Mode            | Line Regulation $\leq$ 0.2 % + 3 mA  |
|                                  | Load Regulation $\leq$ 0.2 % + 3 mA  |
|                                  | Ripple & Noise $\leq$ 3 mArms  |
| Parallel Mode                    | Line Regulation $\leq$ 0.01 % + 3 mV   |
|                                  | Load Regulation $\leq$ 0.01 % + 3 mV   |
| Series Mode                      | Line Regulation $\leq$ 0.01 % + 5 mV   |
|                                  | Load Regulation $\leq$ 300 mV  |
| CH3                              | Output Voltage (2.5 / 3.3 / 5 V) $\pm$ 8 %   |
|                                  | Line Regulation $\leq$ 0.01 % + 3 mV   |
|                                  | Load Regulation $\leq$ 0.01 % + 3 mV   |
|                                  | Ripple & Noise $\leq$ 1 mVrms (5 Hz ~ 1 MHz)   |
| Locking Key                      | Yes  |
| Memory Save / Recall             | 5 Sets   |
| Max Output Power                 | 220 W  |
| Power Source                     | AC 100 V / 120 V / 220 V / 230 V $\pm$ 10 % 50/60 Hz   |
| Standard Configuration Interface | USB Device, LAN  |
| Insulation                       | Case to Terminal $\geq$ 20 M $\Omega$ (DC 500 V)<br>Case to AC line $\geq$ 30 M $\Omega$ (DC 500 V)  |
| Environmental                    | Operating Temperature: 0 °C to +40 °C  |
|                                  | Storage Temperature: -10 °C to +70 °C  |
|                                  | Humidity: 5 % to 90 % relative humidity (non-condensing) up to +30 °C.<br>Upper limit derates to 50 % relative humidity (non-condensing) at +40 °C                                 |
|                                  | Operating Altitude: 2000 m (Max)   |
|                                  | Indoor Use only<br>Pollution Degree 2 (per IEC61010-1:2010)  |
| Dimension                        | 225 (W) $\times$ 143 (H) $\times$ 278 (D) mm   |
| Weight                           | $\approx$ 8.0 kg   |

## Ordering information

|                             |  |
|-----------------------------|--|
| <b>Product Name</b>         | <b>T3PS3000:</b> 3 channels independent output, min resolution 1 mV / 1 mA, USB Device & LAN, 4.3 inch LCD display |
| <b>Standard Accessories</b> | USB Cable -1   |
|                             | Quick Start -1   |
|                             | Product Certificate -1   |
|                             | Calibration Certificate -1   |
|                             | Power cord -1  |
|                             | Output Test Cord -2 Sets   |

# ABOUT TELEDYNE TEST TOOLS



## Company Profile

Teledyne LeCroy is a leading provider of oscilloscopes, protocol analyzers and related test and measurement solutions that enable companies across a wide range of industries to design and test electronic devices of all types. Since our founding in 1964, we have focused on creating products that improve productivity by helping engineers resolve design issues faster and more effectively. Oscilloscopes are tools used by designers and engineers to measure and analyze complex electronic signals in order to develop high-performance systems and to validate electronic designs in order to improve time to market.

The Teledyne Test Tools brand extends the Teledyne LeCroy product portfolio with a comprehensive range of test equipment solutions. This new range of products delivers a broad range of quality test solutions that enable engineers to rapidly validate product and design and reduce time-to-market. Designers, engineers and educators rely on Teledyne Test Tools solutions to meet their most challenging needs for testing, education and electronics validation.

## Location and Facilities

Headquartered in Chestnut Ridge, New York, Teledyne Test Tools and Teledyne LeCroy has sales, service and development subsidiaries in the US and throughout Europe and Asia. Teledyne Test Tools and Teledyne LeCroy products are employed across a wide variety of industries, including semiconductor, computer, consumer electronics, education, military/aerospace, automotive/industrial, and telecommunications.

Distributed by:

## Teledyne LeCroy (US Headquarters)

700 Chestnut Ridge Road  
Chestnut Ridge, NY, USA 10977-6499

Phone: 800-553-2769 or 845-425-2000  
Fax Sales: 845-578-5985  
Phone Support: 1-800-553-2769  
Email Sales: [contact.corp@teledynelecroy.com](mailto:contact.corp@teledynelecroy.com)  
Email Support: [support@teledynelecroy.com](mailto:support@teledynelecroy.com)  
Web Site: <http://teledynelecroy.com/>

## Teledyne LeCroy (European Headquarters)

**Teledyne LeCroy GmbH**  
Im Breitenspiel 11c  
D-69126 Heidelberg, Germany

Phone: +49 6221 82700  
Fax: +49 6221 834655  
Phone Service: +49 6221 8270 85  
Phone Support: +49 6221 8270 28  
Email Sales: [contact.gmbh@teledynelecroy.com](mailto:contact.gmbh@teledynelecroy.com)  
Email Service: [service.gmbh@teledynelecroy.com](mailto:service.gmbh@teledynelecroy.com)  
Email Support: [tlc.t3.appsupport.eu@teledyne.com](mailto:tlc.t3.appsupport.eu@teledyne.com)  
Web Site: <http://teledynelecroy.com/germany>

[teledynelecroy.com](http://teledynelecroy.com)



© 2018 Teledyne Test Tools is a brand and trademark of Teledyne LeCroy Inc. All rights reserved. Specifications, prices, availability and delivery subject to change without notice. Product brand or brand names are trademarks or requested trademarks of their respective holders.

T3 stands for Teledyne Test Tools.

21sep18